

# C2COM-2

## 2 COM Port Control Card

The C2COM-2 installs in any Y-Bus expansion slot of a 2-Series control system to provide two bi-directional RS-232/422/485 ports with hardware handshaking.

### SPECIFICATIONS

#### Connectors

COM A - B: (2) DB9 male, bidirectional RS-232/422/485 ports;  
Up to 115.2k baud, hardware and software handshaking support

#### Power Requirements

Cresnet Power Usage: 3 Watts (0.125 Amps @ 24 Volts DC)

#### Environmental

Temperature: 41° to 113°F (5° to 45°C)

Humidity: 10% to 90% RH (non-condensing)

#### Construction

Y-bus expansion card, occupies (1) Y-bus card slot in a 2-Series control system

#### Dimensions

Height: 0.98 in (2.49 cm)

Width: 5.00 in (12.70 cm)


Depth: 6.78 in (17.21 cm)

#### Available Models

C2COM-2: 2 Port RS-232/422/485 Card for Y-Bus Expansion Slot

#### Available Accessories

CNSP-XX: Custom Serial Interface Cable

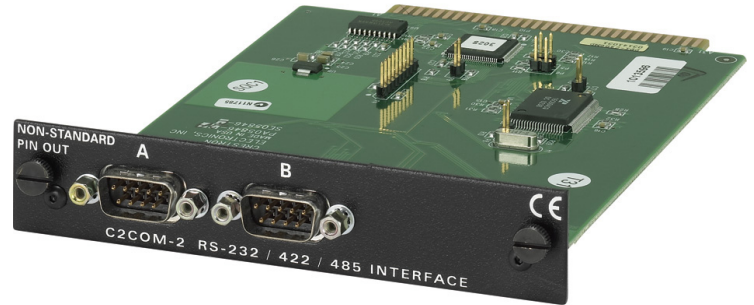

# C2COM-2 2 COM Port Control Card

